


Product Information

TRIEX[®] 3022IR Polycarbonate Resin

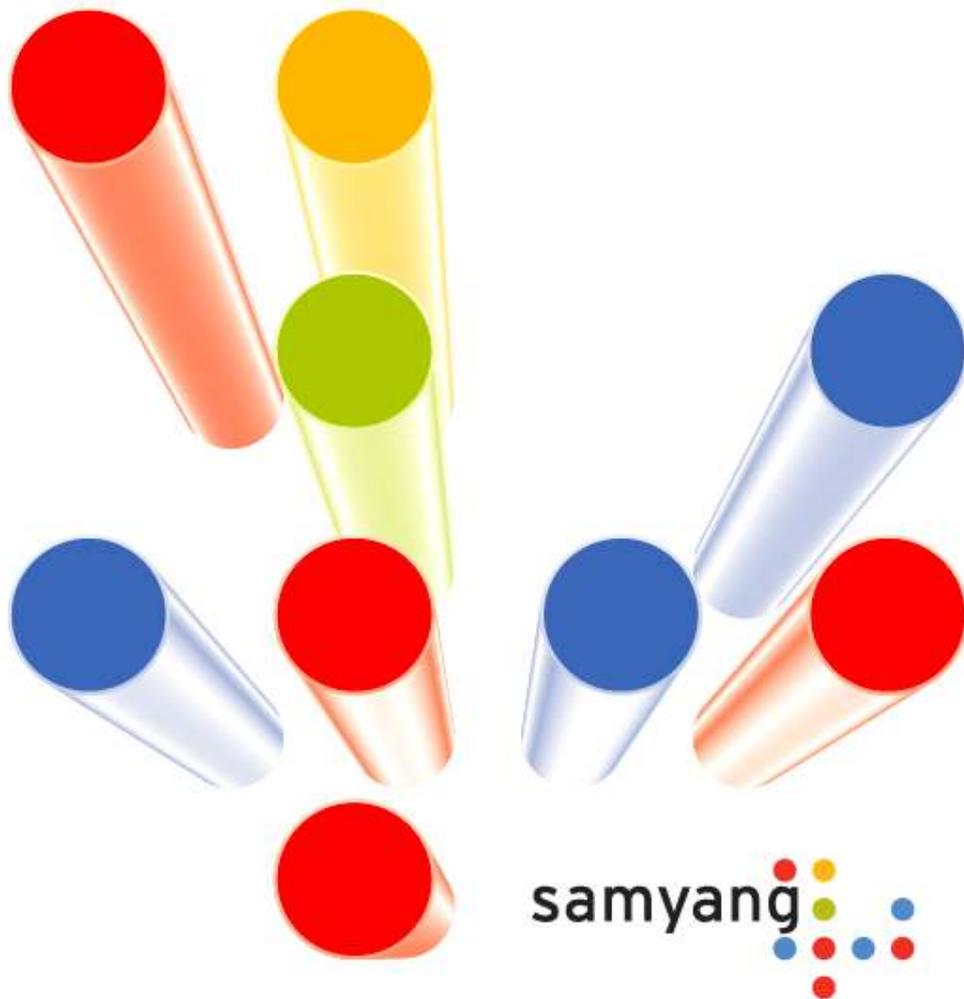

TRIREX 3022IR GRADE

DESCRIPTION

- TRIREX is the registered trademark of polycarbonate resin manufactured by Samyang Corporation. TRIREX polycarbonate resins offer superior mechanical properties, good dimensional stability and high electrical performance, which allows it to be widely used for electrical, electronic, appliance, automotive and optical industries.
- TRIREX 3022IR is a polycarbonate resin grade which has high low temperature impact strength in combination with superior mechanical and physical property.

CHARACTERISTICS

- Superior low temperature impact resistance
- Good flow-ability
- Workable under a wide range of temperatures (-100 °C ~ 135 °C)
- High electrical performance
- Good dimensional stability
- Low moisture absorbency
- Good weather resistance

APPLICATIONS

- TRIREX 3022IR resin grade is used for electric and electronic applications, food contact materials and etc.
- Medium viscosity. Transparent colors only.

TYPICAL DATA OF TRIEX 302IR GRADE



PROPERTY	UNIT	ASTM METHOD	TYPICAL DATA
PHYSICAL			
Specific Gravity	-	D792	1.20
Water Absorption (24 hours at 23°C)	%	D570	0.15
Melt Flow Rate (300°C, 1.2kg)	g/10min	D1238	14
MECHANICAL			
Tensile Strength at yield	kg _f /cm ²	D638	700
Tensile Elongation at break	%	D638	130
Flexural Strength at yield	kg _f /cm ²	D790	950
Flexural Modulus	kg _f /cm ²	D790	23,000
Izod Impact Strength, notched, 23°C (1/8")	kg _f ·cm/cm	D256	90
Rockwell Hardness	R scale	D785	
THERMAL			
HDT, 18.6 kg _f /cm ²	°C	D648	134
Coefficient of Linear Thermal Expansion	mm/mm/°C	D696	5~7 x 10 ⁻⁵
ELECTRICAL			
Volume Resistivity	Ω·cm	D257	4 x 10 ¹⁶
Dielectric Strength	kV/mm	D149	30
Dielectric Constant	-	D150	
Dissipation Factor	-	D150	
ARC Resistance	sec	D495	120
OTHERS			
UL-94 Flammability (1/16" thickness)	-	(UL 94)	V-2
Mold Shrinkage (3mm thickness)	%	D955	0.5~0.7

※ The figures listed in this table are typical values obtained under the standard test methods and may not be applicable for products that are under different application condition.

PROCESSING GUIDE FOR TRIEX 3022IR GRADE



- General processing conditions for TRIEX 3022IR are shown below. Drying prior to processing is essential to ensure desired appearance and property performance.

SPECIFICATION	UNIT	CONDITIONS
Drying Temperature	°C	120
Drying Time	hr	3 ~ 5
Moisture Content, Max	%	0.02
Melt Temperature	°C	275 ~ 310
Nozzle Temperature	°C	275 ~ 310
Front Temperature	°C	275 ~ 300
Middle Temperature	°C	260 ~ 285
Rear Temperature	°C	245 ~ 270
Mold Temperature	°C	65 ~ 105
Back Pressure	MPa	0.25 ~ 0.7
Screw Speed	rpm	40 ~ 70
Vent Depth	mm	0.02 ~ 0.08

HEAD OFFICE

Samyang Corporation
263 Yeonji-dong, Jongno-gu, Seoul, Korea
TEL 82-2-740-7752 FAX 82-2-740-7700

R&D CENTER

63-2 Hwaam-dong, Yuseong-gu, Daejeon, Korea
TEL 82-42-865-8053 FAX 82-42-865-8099

JEONJU PLANT

407 Palbok-dong 3-ga, Deokjin-gu, Jeonju, Korea
TEL 82-63-210-6660 FAX 82-63-210-6677

SAMYANG KASEI

409 Palbok-dong 3-ga, Deokjin-gu, Jeonju, Korea
TEL 82-63-210-1114 FAX 82-63-211-1240

SAMYANG ENGINEERING PLASTICS (SHANGHAI) CO., LTD.

131, Shuangying-lu, Qingpu Gongyeyuan-qu,
Qingpu-qu, Shanghai, P.R.China
TEL 86-21-6922-2086 FAX 86-21-6922-2271